

80FRG42VP

FRIGGITRICE A GAS CON 2 VASCHE A "Y" DA 21+21 LT.

GAS FRYER WITH 2 "Y" TANKS 21+21 LT.

Caratteristiche

Features



Piano e vasca stampati con ampie raggiature, in acciaio inox AISI 304 | Vasche a forma di "Y" trattata con vernice silicea vulcanizzata che ne migliora il rendimento | Isolamento termico della camera di combustione | Ampia zona fredda sul fondo per il deposito delle impurità | Scarico dell'olio mediante rubinetto a sfera nella bacinella inox alloggiata nel mobile | 2 vasche indipendenti da 21+21 lt. | Bruciatori in acciaio inox situati sotto la vasca | Regolazione termostatica della temperatura da 90° a 190°C con indicatore luminoso che ne indica il funzionamento | Elettrovalvola di sicurezza e termocoppia | Accensione elettronica del pilota | Termostato di sicurezza a riarmo manuale | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

Top and tank pressed with fully rounded corners, in AISI 304 stainless steel | Y-shaped tanks treated with vulcanized silicone paint so as to improve thermal efficiency | Heat insulation of the combustion chamber | Large cold zone on the bottom for depositing of impurities | Oil drainage by means of ball cock into the stainless steel tray housed in the base unit | 2 independent tanks 21+21 lt. | Burners in stainless steel located under the tank | Thermostatic regulation of the temperature from 90° to 190°C with indicator light showing when functioning | Safety electro valve and thermocouple | Electronic pilot ignition | Safety thermostat with manual reset | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW




ALIMENTAZIONE
FEEDING



ALLACC. GAS
GAS CONNECTION

80FRG42VP	800x900x900	38	230 V	Ø 3/4"
VOLUME m ³	PESO Kg WEIGHT Kg	POTENZA ELETTRICA KW ELECTRIC POWER KW	-	ALLACC. ELETTRICO ELEC. CONNECTION
1,2	135	0,02	-	VAC230-1N 50/60Hz

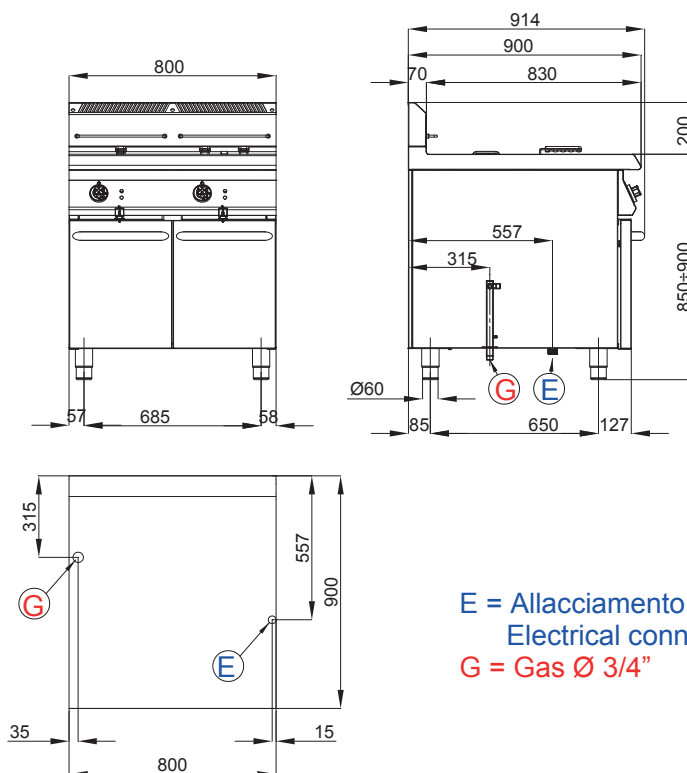

E = Allacciamento elettrico
Electrical connection
G = Gas Ø 3/4"