

80PQG15I

| PENTOLA GAS INDIRETTA 150 LT.

| INDIRECT GAS BOILING PANS 150 LT.

| Caratteristiche

| Features



| Struttura esterna e piano di lavoro in acciaio inox AISI 304 | Vasca coibentata e fondo in acciaio inox AISI 316
 | Coperchio incernierato posteriormente e bilanciato a molla con maniglia atermica | Capacità vasca 150 lt.
 | Gruppo riempimento vasca in ottone cromato con ripristino dell'acqua nell'intercapedine | Rubinetto di scarico frontale in ottone cromato con maniglia atermica | Vasca con intercapedine | Visualizzazione della pressione nell'intercapedine mediante manometro | Rubinetto per il controllo del livello | Riscaldamento a gas indiretto con bruciatori in acciaio inox a fiamma stabilizzata | Rubinetto valvolato con fiamma pilota per l'accensione dei bruciatori | Accensione piezoelettrica del pilota | Termostato di sicurezza a riarmo manuale | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| External structure and worktop in AISI 304 stainless steel | Tank insulated with bottom in AISI 316 stainless steel | Lid hinged at the back and counter-balanced, with heat-resistant handle | Tank capacity 150 lt. | Tank filling unit in chromium-plated brass with topping up water in racket | Front drainage tap in chromium-plated brass with heat-resistant handle | Tank with jacket | Pressure in the water-filled jacket is visible on a pressure gauge | Tap for checking water level | Indirect gas heating with stainless steel burners with stabilized flame | Valve tap with pilot flame for burner ignition | Piezoelectric ignition of the pilot flame | Safety thermostat with manual reset | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW



VOLUME m³




PESO Kg
WEIGHT Kg



ALLACCIAMENTO GAS
GAS CONNECTION

80PQG15I	800x900x900	21	1,4	185	Ø 1/2"
----------	-------------	----	-----	-----	--------

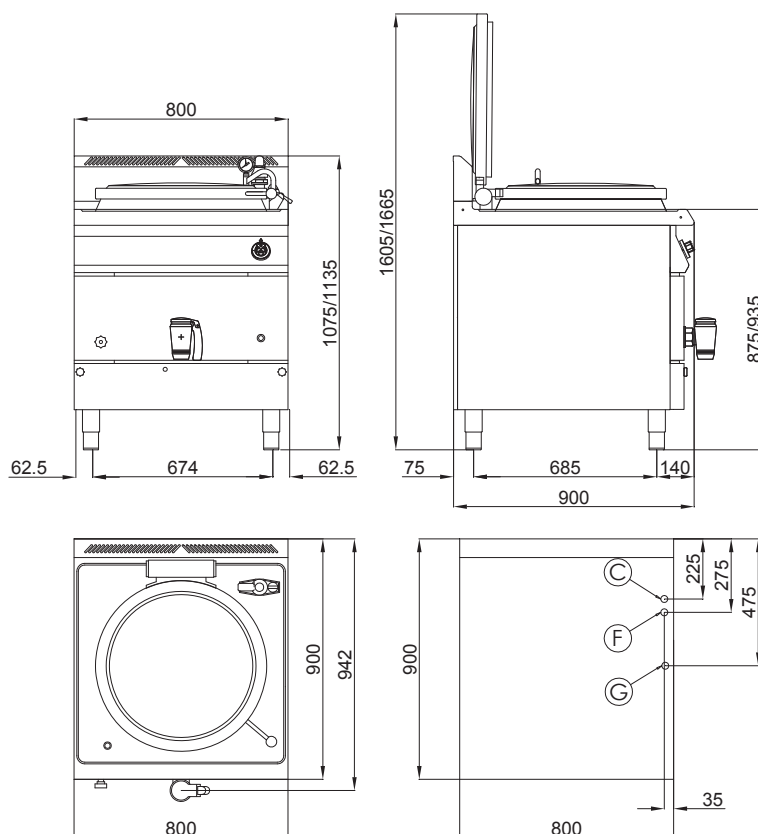

G = Gas Ø 1/2"

C = Carico acqua calda 10 mm

Hot water supply 10 mm

F = Carico acqua fredda 10 mm

Cold water supply 10 mm