





| Cooking plate in special thick honed steel | 30/10 perimeter splashguard in ISI 304 hermetically welded stainless steel | Removable fat collecting drawer | Dual control for the differentiated heating of the plate | INCOLOY armoured heating elements in direct contact with the lower surface of the plate | Thermostatic temperature regulation from 100° to 300°C | Safety thermostat with manual reset | Warning lights for functioning control | Removable vitrified cast iron exhaust grate | Control panel which can be quickly removed for easy cleaning and maintenance



ALLACC. ELETTRICO
ELEC. CONNECTION

70TFELRC(800)	800x730x290	9,6	0,4	88	400 V	VAC400-3N 50/60Hz
---------------	-------------	-----	-----	----	-------	-------------------

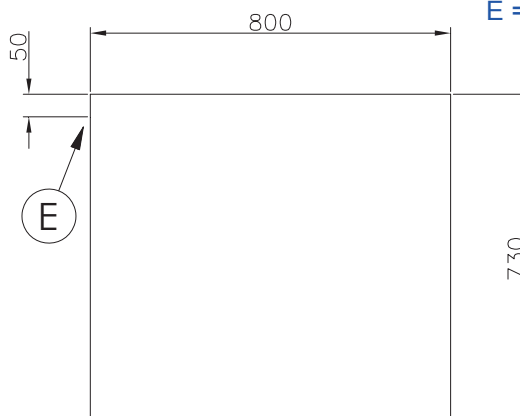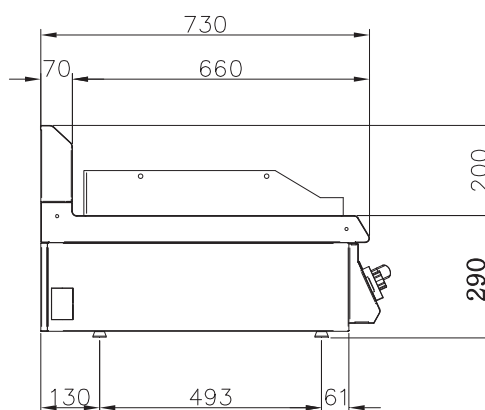

E = Allacciamento elettrico
Electrical connection