

80CBG26CFE

| CUCINA 6 FUOCHI GAS, FORNO ELETTRICO E VANO CALDO

| 6 BURNERS GAS RANGE, GAS OVEN AND HOT CABINET

## | Caratteristiche

## | Features



| Piano di lavoro in acciaio inox AISI 304 | Griglie del piano in ghisa vetrificata | Bacinelle raccogliogocce del piano estraibili in acciaio inox AISI 304 stampate ad angoli arrotondati | Bruciatori in ghisa vetrificata con spartifiamma in ottone a doppia corona a fiamma stabilizzata (3 x 4,5 kW, 3 x 10,0 kW) | Rubinetti valvolati con fiamma pilota per l'accensione del bruciatore | Forno elettrico GN 2/1 riscaldato da resistenze corazzate INCOLOY indipendenti regolate da termostati regolabili da 50° a 300°C | Termostato di sicurezza a riarmo manuale | Guide reggigriglie a tre posizioni ed estraibili per la completa pulizia della camera | Vano riscaldato da resistenza elettrica controllata da termostato regolabile da 30° a 90°C | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| Work top in AISI 304 stainless steel | Top grids are in vitrified cast iron | Removable drip-collecting trays in AISI 304 stainless steel with rounded corners | Burners in vitrified cast iron with burner cap in brass with double ring and stabilized flame (3 x 4,5 kW, 3 x 10,0 kW) | Valve tap with pilot flame for gas burner ignition | Electric oven GN 2/1 heated by independent INCOLOY armoured heating elements controlled by thermostats regulating from 50° to 300°C | Safety thermostat with manual reset position shelf runners which can be removed for thorough oven cleaning | 3-position shelf runners which can be removed for thorough oven cleaning | Cabinet heated by electrical element controlled by thermostat regulating from 30° to 90°C | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO  
MODEL



DIMENSIONI mm  
DIMENSIONS mm



POTENZA GAS KW  
GAS POWER KW







ALIMENTAZIONE  
FEEDING



ALLACC. GAS  
GAS CONNECTION

|                       |                      |                                           |       |                                       |
|-----------------------|----------------------|-------------------------------------------|-------|---------------------------------------|
| 80CBG26CFE            | 1200x900x900         | 43,5                                      | 400 V | Ø 1/2"                                |
| VOLUME m <sup>3</sup> | PESO Kg<br>WEIGHT Kg | POTENZA ELETTRICA KW<br>ELECTRIC POWER KW | -     | ALLACC. ELETTRICO<br>ELEC. CONNECTION |
| 1,8                   | 235                  | 6,3                                       | -     | VAC400-3N 50/60Hz                     |

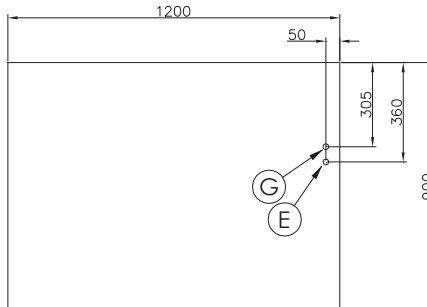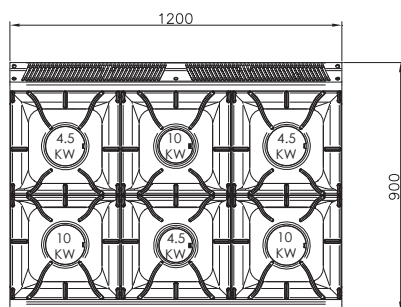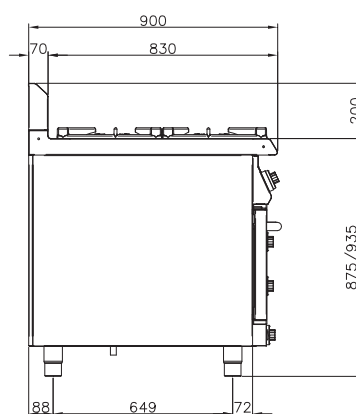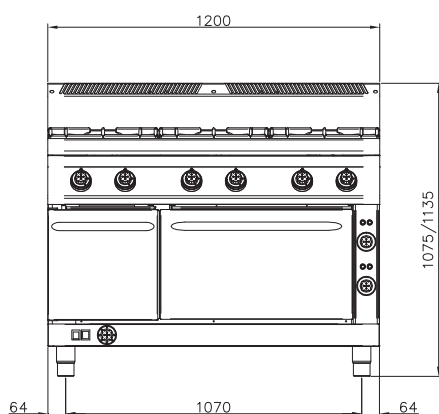

G = Gas Ø 1/2"

E = Allacciamento elettrico  
Electrical connection