

80CVE02

CUCINA ELETTRICA VETROCERAMICA 2 ZONE SU MOBILE APERTO

2 ELECTRIC ZONES GLASS CERAMIC RANGE ON OPEN-FRONTED UNIT



Caratteristiche Features

Piano in vetroceramica extra resistente spessore 6 mm | 2 zone di cottura (ciascuna suddivisa in 2 zone indipendenti) regolabili da un minimo di 1,3 kW a un massimo di 3,4 kW | L'accensione degli elementi riscaldanti e la regolazione della potenza avviene con regolatore di energia | Sensori con indicatori luminosi di vetro incandescente | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

Top in highly resistant glass ceramic, with thickness of 6mm | 2 cooking zones (each one subdivided into 2 independent zones) regulate from a minimum of 1.3 kW to a maximum 3.4 kW | The ignition of the heating elements and the regulation of the power are controlled by an energy regulator | Sensor with indicator lights in incandescent glass | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA ELETTRICA KW
ELECTRIC POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg



ALIMENTAZIONE
FEEDING



ALLACC. ELETTRICO
ELEC. CONNECTION

80CVE02

400x900x900





6,8

0,6

60

400 V

VAC400-3N 50/60Hz

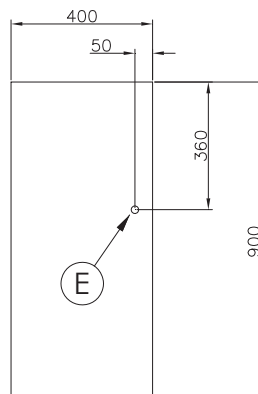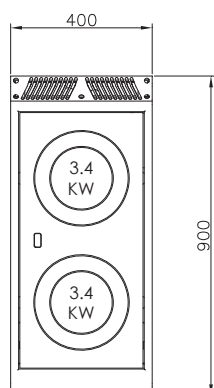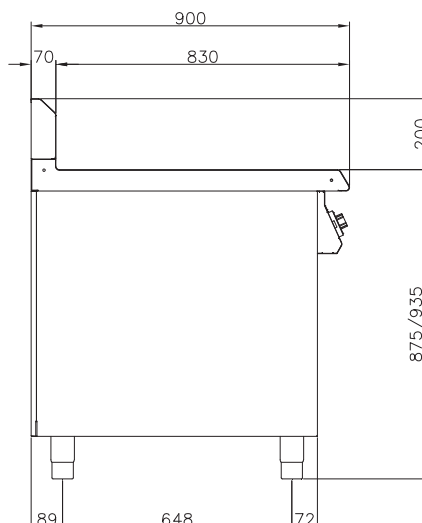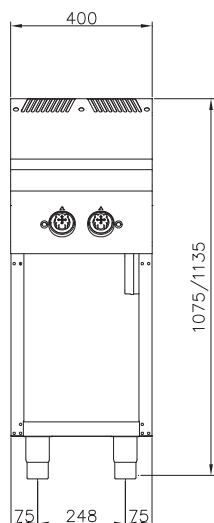

E = Allacciamento elettrico
Electrical connection