



| Caratteristiche

| Features

| Piano in vetroceramica extra resistente spessore 6 mm | 2 zone di cottura di differenti potenze, una con potenza fissata di 1,8 kW e una con due livelli di potenza regolabile da un minimo di 1kW a un massimo di 2,5 kW | L'accensione degli elementi riscaldanti e la regolazione della potenza avviene con regolatore di energia | Sensori con indicatori luminosi di vetro incandescente | Scarico fumo in ghisa rimovibile

| Top in highly resistant glass ceramic, with thickness of 6mm | 2 cooking zones of different powers, one with a fixed power of 1.8 kW and one with two levels of power that can be regulated from a minimum of 1 kW to a maximum of 2.5 kW | The ignition of the heating elements and the regulation of the power are controlled by an energy regulator | Sensor with indicator lights in incandescent glass | Removable vitrified cast iron exhaust grate



MODELLO
MODEL

DIMENSIONI mm
DIMENSIONS mm

POTENZA ELETTRICA KW
ELECTRIC POWER KW

VOLUME m³

PESO Kg
WEIGHT Kg

ALIMENTAZIONE
FEEDING

ALLACC. ELETTRICO
ELEC. CONNECTION

70TCE2V

400x730x290





4.3

0,2

33

400 V

VAC400-3N 50/60Hz

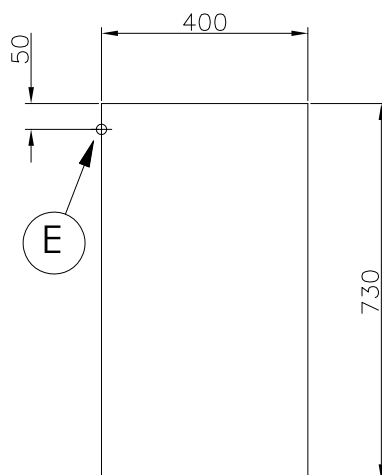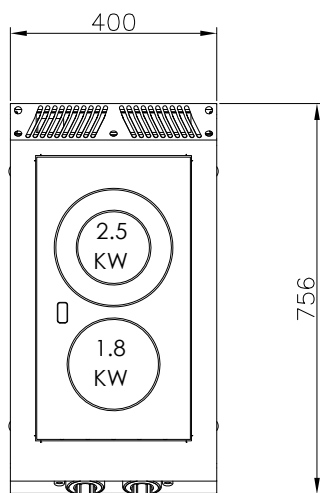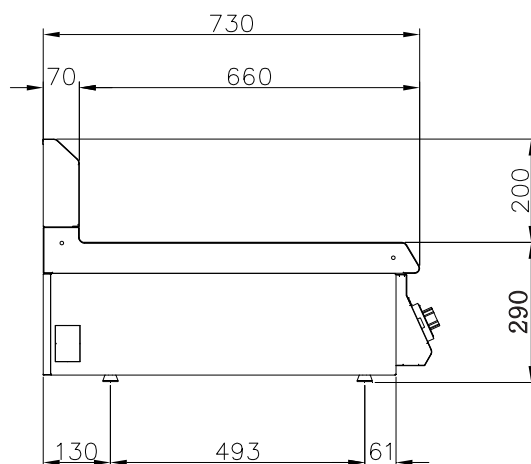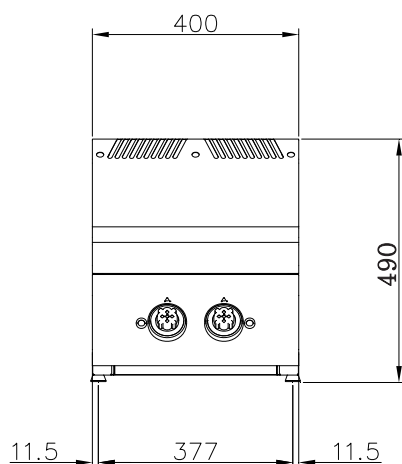

E = Allacciamento elettrico
Electrical connection