

90BRE20I

| BRASIERA RIBALTABILE ELETTRICA, VASCA INOX DA 205 LT.

| ELECTRIC TILTING BRATT PAN, STEEL TANK 205 LT.

| Caratteristiche

| Features



| Struttura esterna e coperchio in acciaio inox AISI 304 | Coperchio incernierato posteriormente e bilanciato a molla | Ribaltamento manuale della vasca ottenuto mediante volantino in materiale termostatico e vite senza fine | Vasca con pareti in acciaio inox AISI 304 e fondo in acciaio inox di grosso spessore | Rubinetto carico acqua | Resistenze corazzate INCOLOY a diretto contatto del fondo esterno termodiffusore della vasca | Regolazione termostatica della temperatura da 50° a 300°C | Termostato di sicurezza a riarmo manuale | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| External structure and lid in AISI 304 stainless steel | Lid hinged at the back and counter-balanced with spring | Manual tipping of the tank by means of hand wheel in thermoplastic material and self-tapping screw | Tank with walls and bottom in AISI 304 stainless steel | Water-filling tap | INCOLOY armoured heating elements in direct contact with the heat-radiating external bottom of the tank | Thermostatic regulation of the temperature from 50° to 300°C | Safety thermostat with manual reset | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA ELETTRICA KW
ELECTRIC POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg





ALIMENTAZIONE
FEEDING



ALLACC. ELETTRICO
ELEC. CONNECTION

90BRE20I	1600x900x950	24,8	2,5	340	400 V	VAC400-3N 50/60Hz
----------	--------------	------	-----	-----	-------	-------------------

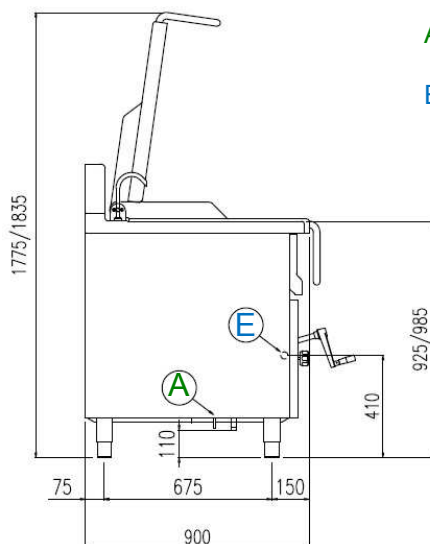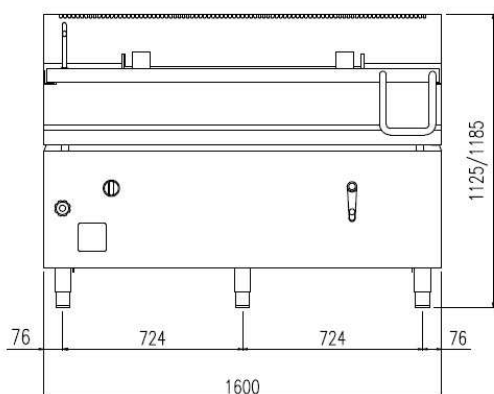

A = Carico acqua ø 12 mm
Water supply ø 12 mm
E = Allacciamento elettrico
Electric connection

