

# 8FRG23HP

## FRIGGITRICE ELETTRONICA A GAS CON VASCA 23 LT.

## GAS ELECTRONIC FRYER WITH TANK 23 LT.

### Caratteristiche Features



| Piano e vasca stampati con ampie raggiature, in acciaio inox AISI 304 | Vasca a forma di "Y" trattata con vernice siliconica vulcanizzata che ne migliora il rendimento | Isolamento termico della camera di combustione | Ampia zona fredda su fondo per il deposito delle impurità | Scarico dell'olio mediante rubinetto a fera all'esterno del mobile | 1 vasca 23 lt. | Sistema di combustione a premiscelazione totale con modulazione della potenza di riscaldamento per una elevata efficienza e basse emissioni | Bruciatori radianti in acciaio inox situati sotto la vasca | Sistema elettronico avanzato per il controllo automatico del riscaldamento | Pannello di comando con ampio display LCD, 5 tasti multifunzione e 3 led di segnalazione | Regolazione della temperatura da 140° a 185°C (precisione +/- 1°C) | Preriscaldamento automatico in fase di avviamento e scioglimento graduale di grassi solidi mediante riscaldamento intermittente | Termostato di sicurezza a riarmo manuale | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Piedini in acciaio inox regolabili in altezza

| Top and tank pressed with rounded corners, in AISI stainless steel | Y-shaped tank treaded with vulcanized silicone paint so as to improve thermal efficiency | Heat insulation of the combustion chamber | Large cold zone on the bottom for depositing of impurities | Oil drainage by means of ball cock outside the body, whit pipe drain extension | 1 tank 23 lt. | Pre-mixed combustion system whit heating power modulation for high efficiency and low emission | Radiant burners in stainless steel located under the tank | Advanced electronic system for automatic heating control | Control panel featuring a wide LCD display, 5 multifunction buttons and 3 signal leds | Temperature regulation from 140° to 185°C (precision +/- 1°C) | Automatic initial pre-heating and gradual melting of solid fats by means of intermittent heating | Safety thermostat with manual reset | Control panel which can be quickly removed for easy cleaning and maintenance | Adjustable AISI 304 stainless steel feet



MODELLO  
MODEL

8FRG23HP



DIMENSIONI mm  
DIMENSIONS mm

400x900x900



POTENZA GAS KW  
GAS POWER KW

25



ALIMENTAZIONE  
FEEDING

230 V



ALLACC. GAS  
GAS CONNECTION

Ø 1/2"

VOLUME m<sup>3</sup>

0,6

PESO Kg  
WEIGHT Kg

90

POTENZA ELETTRICA KW  
ELCTRIC POWER KW




0,050

-

-

ALLACC. ELETTRICO  
ELEC. CONNECTION

VAC230-1N 50/60Hz

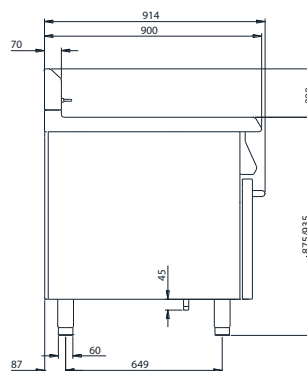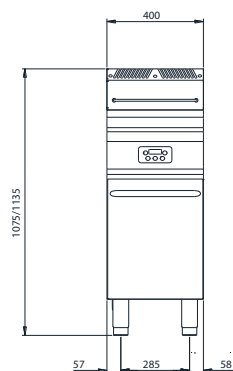

G = ATTACCO GAS 1/2"  
GAS INLET 1/2"

E = ALLACCIAMENTO ELETTRICO  
ELECTRICAL CONNECTION INLET