

80CPG90C

| CUOCIPASTA GAS CON 2 VASCHE 45+45 LT.

| GAS PASTA COOKER WITH 2 TANKS 45+45 LT.

| Caratteristiche

| Features

| Costruito in acciaio inox AISI 304 | Vasca in acciaio inox AISI 316 con ampie raggiature | Zona appoggio cestelli sul piano forato con invaso per la scolatura dell'acqua | 2 vasche indipendenti da 45+45 Lt. capacità GN 1/1 | Carico automatico dell'acqua necessaria al mantenimento del livello | Interruttore per il carico manuale dell'acqua in vasca | Rubinetto scarico acqua | Bruciatore in acciaio inox a fiamma stabilizzata | Rubinetto valvolato con fiamma pilota per l'accensione del bruciatore | Accensione piezoelettrica del pilota | Camera di combustione intorno alle vasche | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

| Built in stainless steel AISI 304 | Tank in AISI 316 stainless steel with fully rounded corners | Baskets rest on perforated top which incorporates channel for drainage | 2 independent tanks 45+45 Lt. capacity GN 1/1 | Automatic water inlet for maintaining water level | Switch for manual water filling | Water cock for emptying | Burner in stainless steel with stabilized flame | Valve tap with pilot flame for gas burner ignition | Piezoelectric ignition of pilot | Combustion chamber around the tanks | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW



ALIMENTAZIONE
FEEDING



ALLACC. GAS
GAS CONNECTION

80CPG90C

800x900x900

27,8

230 V

Ø 1/2"

VOLUME m³

PESO Kg
WEIGHT Kg

POTENZA ELETTRICA KW
ELECTRIC POWER KW

-

-

ALLACC. ELETTRICO
ELEC. CONNECTION


1,2

120

0,1

-

VAC230-1N 50/60Hz

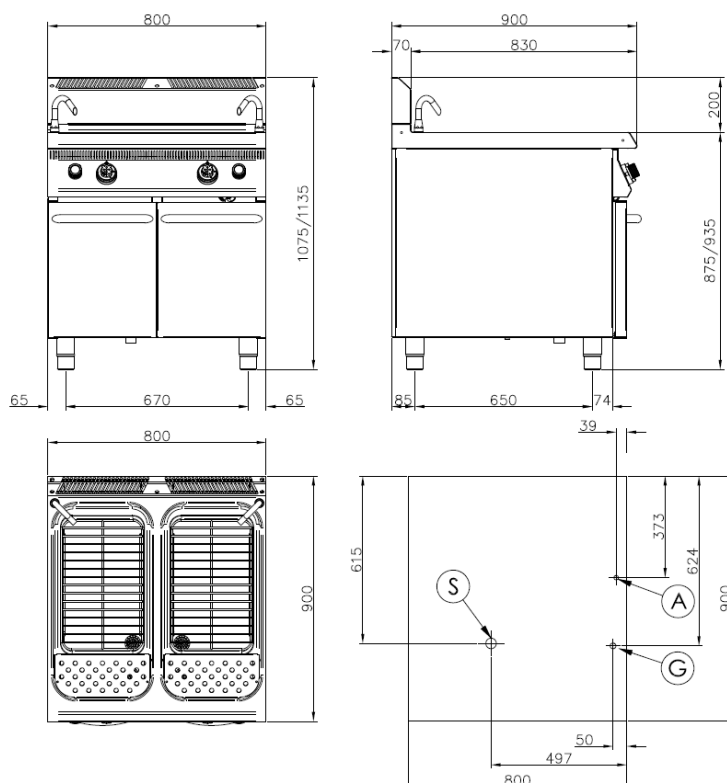

A = Carico acqua Ø 3/4"
Water supply Ø 3/4"
S = Scarico acqua Ø 1"
Water drain Ø 1"
G = Gas Ø 1/2"