

80TPG10FE

TUTTAPIASTRA A GAS SU FORNO ELETTRICO

GAS HOTPLATE RANGE ON ELECTRIC OVEN

Caratteristiche

Features



Piastra di cottura di grosso spessore in acciaio speciale per cottura a fiamma indiretta | Inserto centrale estraibile mediante gancio in tondino cromato | Riscaldamento ottenuto mediante bruciatore circolare in acciaio inox da 13,9 kW | Rubinetto valvolato con fiamma pilota per l'accensione del bruciatore | Accensione piezoelettrica del pilota | Forno elettrico GN 2/1 riscaldato da resistenze corazzate INCOLOY indipendenti controllate da termostati regolabili da 50° a 300°C | Termostato di sicurezza a riarmo manuale | Guide reggigriglie a tre posizioni ed estraibili per la completa pulizia della camera | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

Thick cooking plate in special steel for cooking with an indirect flame | Central insert which can be removed by using the chromium-plated solid steel hook | Heating provided by circular burner in high-performance stainless steel for 13,9 kW | Valve tap with pilot flame for gas burner ignition | Piezoelectric pilot ignition | Electric oven GN 2/1 heated by independent INCOLOY armoured heating elements controlled by thermostats regulating from 50° to 300° | Safety thermostat with manual reset | 3-position shelf runners which can be removed for easy cleaning and maintenance | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW



ALIMENTAZIONE
FEEDING



ALLACC. GAS
GAS CONNECTION

80TPG10FE

800x900x900

13,9

400 V

Ø 1/2"

VOLUME m³

PESO Kg
WEIGHT Kg

POTENZA ELETTRICA KW
ELECTRIC POWER KW

-

ALLACC. ELETTRICO
ELEC. CONNECTION

-


1,2

226

5,5

-

VAC400-3N 50/60Hz

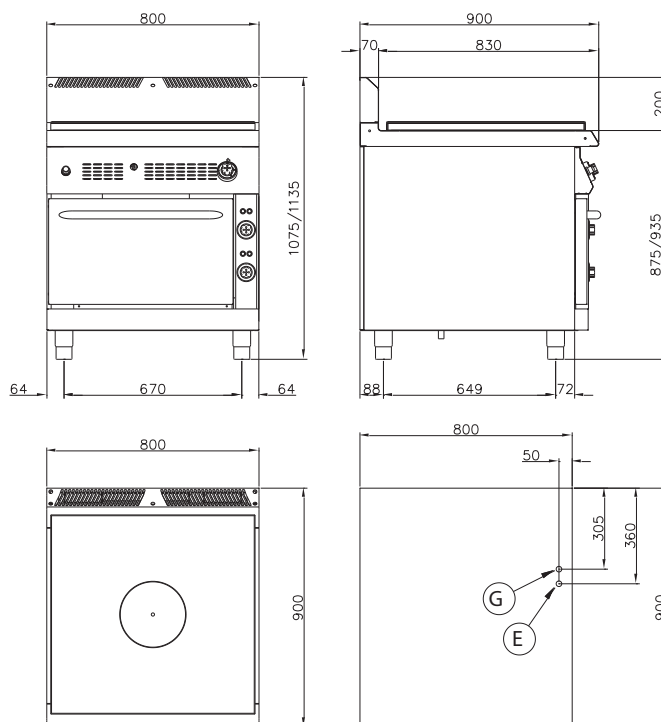

E = Allacciamento elettrico
Electrical connection