

80FRE17R

FRIGGITRICE ELETTRONICA ELETTRICA CON 1 VASCA DA 17 LT.

ELECTRONIC ELECTRIC FRYER WITH 1 TANK 17 LT.

Caratteristiche Features



Piano e vasca stampati con ampie raggiature, in acciaio inox AISI 304 | Ampia zona fredda sul fondo per il deposito delle impurità | Scarico dell'olio mediante rubinetto a sfera nella bacinella inox alloggiata nel mobile | 1 vasca da lt. 17 | Resistenze corazzate in acciaio inox AISI 304 ruotabili di 90°C per facilitare la pulizia della vasca | Regolazione della temperatura da 30° a 195°C mediante scheda termostatica | Display digitale per la lettura della temperatura (precisione $\pm 1^\circ\text{C}$) | Pulsante "RAPID" per scioglimento graduale di grassi solidi mediante riscaldamento iniziale intermittente programmabile | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia | Scarico fumo in ghisa rimovibile | Piedini in acciaio inox regolabili in altezza

Top and tank pressed with fully rounded corners, in aisi 304 stainless steel | Large cold zone on the bottom for depositing of impurities | Oil drainage by means of ball cock into the stainless steel tray housed in the base unit | 1 tank 17 lt. | AISI 304 armored stainless steel heating elements which can be turned 90° to facilitate the cleaning of the tank | Regulation of the temperature from 30° to 195°C by means of thermostatic card | Digital display for the reading of the temperature (precision $\pm 1^\circ\text{C}$) | "RAPID" button for gradual melting of solid fats by means of intermittent initial heating | Control panel which can be quickly removed for easy cleaning and maintenance | Removable vitrified cast iron exhaust grate | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA ELETTRICA KW
ELECTRIC POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg



ALIMENTAZIONE
FEEDING



ALLACC. ELETTRICO
ELEC. CONNECTION

80FRE17R

400x900x900



16,5

0,6

68

400 V

VAC400-3N 50/60Hz

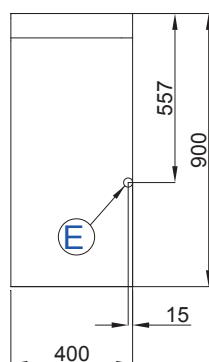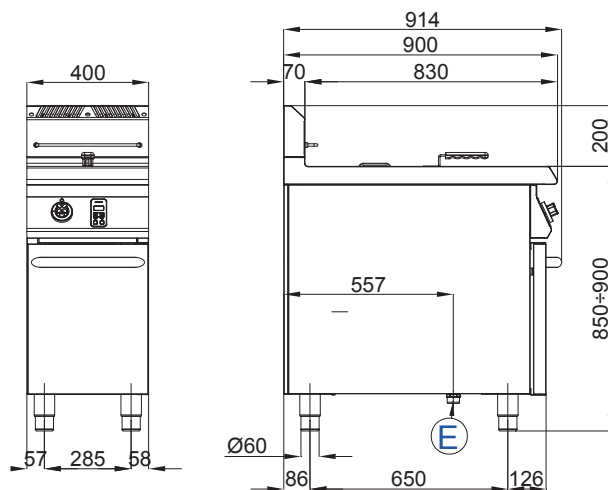

E = Allacciamento elettrico
Electrical connection