

70FRE34

FRIGGITRICE ELETTRICA CON 2 VASCHE DA 17+17 LT.

ELECTRIC FRYER WITH 2 TANKS 17+17 LT.

Caratteristiche Features

Piano e vasca stampati con ampie raggiature, in acciaio inox AISI 304 | Ampia zona fredda sul fondo per il deposito delle impurità | Scarico dell'olio mediante rubinetto a sfera nella bacinella inox alloggiata nel mobile | 2 vasche indipendenti da 17+17 lt. | Resistenze corazzate in acciaio inox AISI 304 ruotabili di 90°C per facilitare la pulizia delle vasche | Regolazione termostatica della temperatura da 90° a 190°C con indicatore luminoso che ne indica il funzionamento | Termostato di sicurezza a riarmo manuale | Scarico fumo in ghisa rimovibile | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Piedini in acciaio inox regolabili in altezza

Top and tank pressed with fully rounded corners, in AISI 304 stainless steel | Large cold zone on the bottom for depositing of impurities | Oil drainage by means of ball cock into the stainless steel tray housed in the base unit | 2 indipendent tanks 17+17 lt. | AISI 304 armored stainless steel heating elements which can be turned 90° to facilitate the cleaning of the tanks | Thermostatic regulation of the temperature from 90° to 190°C with indicator light which shows when functioning | Safety thermostat with manual reset unit | Removable vitrified cast iron exhaust grate | Control panel which can be quickly removed for easy cleaning and maintenance | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA ELETTRICA KW
ELECTRIC POWER KW



VOLUME m³



PESO Kg
WEIGHT Kg




ALIMENTAZIONE
FEEDING



ALLACC. ELETTRICO
ELEC. CONNECTION

70FRE34	800x730x900	33	0,9	88	400 V	VAC400-3N 50/60Hz
---------	-------------	----	-----	----	-------	-------------------

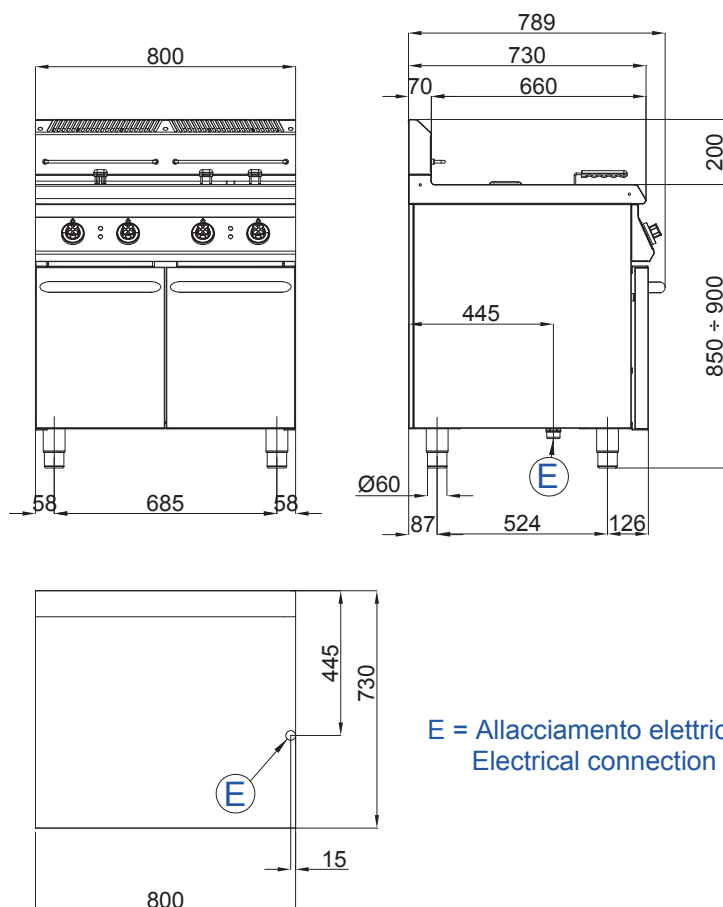

E = Allacciamento elettrico
Electrical connection