

70GRE40

| GRIGLIA A RADIANTE AD ACQUA SU MOBILE APERTO

| WATER-HEATED RADIATING GRID ON OPEN-FRONTED UNIT

| Caratteristiche

| Features

| Grigliato per pesce (standard) o carne in acciaio inox AISI 304 | Grigliato facilmente estraibile per la pulizia e manutenzione | Resistenze corazzate INCOLOY a diretto contatto dei cupolini posti sotto il grigliato | Regolazione della temperatura massima e minima mediante movimento del grigliato | Interruttore generale di accensione | Trasferimento del calore per mezzo di cupolini in acciaio posti al di sopra delle resistenze | Lampada spia per il controllo del funzionamento | Bacinella acqua | Rubinetto carico e scarico acqua | Scarico fumo in ghisa rimovibile | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia e manutenzione | Piedini in acciaio inox regolabili in altezza

| Fish grid (standard) or meat grid in stainless steel AISI 304 | Grid easily removable for easy cleaning and maintenance | INCOLOY armoured heating elements in contact with the small steel dome-shaped set bottom of the grid | Regulation of the maximum and minimum temperature by grid movement | Master on-off switch | Transfer heat by small dome-shaped set above heating elements | Warning lights for functioning control | Water basin | Water cock for filling and emptying | Removable vitrified cast iron exhaust grate | Control panel which can be quickly removed for easy cleaning and maintenance | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL

DIMENSIONI mm
DIMENSIONS mm

POTENZA ELETTRICA KW
ELECTRIC POWER KW

VOLUME m³

PESO Kg
WEIGHT Kg

ALIMENTAZIONE
FEEDING

ALLACC. ELETTRICO
ELEC. CONNECTION

70GRE40

400x730x900


6,4

0,9

77

400 V

VAC400-3N 50/60Hz

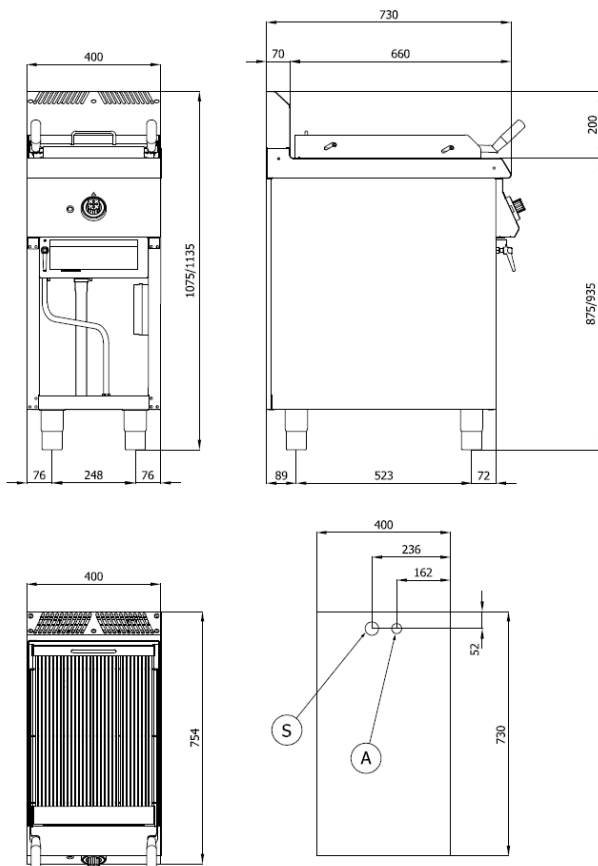

A = Carico acqua $\varnothing \frac{3}{8}$ "
Water supply $\varnothing \frac{3}{8}$ "
S = Scarico acqua $\varnothing 32$ "
Water drain $\varnothing 32$ "