

11FRG22R

| FRIGGITRICE ELETTRONICA A GAS CON 1 VASCA DA 22 LT.

| GAS ELECTRONIC FRYER WITH 1 TANK 22 LT.

| Caratteristiche

| Features



| Piano e vasca stampati con ampie raggiate, in acciaio inox AISI 304 | Ampia zona fredda sul fondo per il deposito delle impurità | Scarico dell'olio mediante rubinetto a sfera nella bacinella inox alloggiata nel mobile | 1 vasca da lt. 22 | Bruciatori in ghisa nichelati ad alto rendimento termico | Tubi scambiatori passaggio fiamma situati all'interno della vasca | Regolazione della temperatura da 30° a 195°C mediante scheda termostatica | Display digitale per la lettura della temperatura (precisione $\pm 1^\circ\text{C}$) | Accensione elettronica del pilota | Pulsante "RAPID" per scioglimento graduale di grassi solidi mediante riscaldamento iniziale intermittente programmabile | Pannello comandi facilmente estraibile per facilitare le operazioni di pulizia | Piedini in acciaio inox regolabili in altezza

| Top and tank pressed with fully rounded corners, in aisi 304 stainless steel | Large cold zone on the bottom for depositing of impurities | Oil drainage by means of ball cock into the stainless steel tray housed in the base unit | 1 tank 22 lt. | Burners in nickel-plated cast iron with high thermal efficiency | Flame passage exchanger tubes situated on the inside of the tank | Regulation of the temperature from 30° to 195°C by means of safety electro valve and thermocouple controlled by thermostatic card | Digital display for the reading of the temperature (precision $\pm 1^\circ\text{C}$) | Electronic pilot ignition | "RAPID" button for gradual melting of solid fats by means of intermittent initial heating | Control panel which can be quickly removed for easy cleaning and maintenance | Adjustable AISI 304 stainless steel feet



MODELLO
MODEL



DIMENSIONI mm
DIMENSIONS mm



POTENZA GAS KW
GAS POWER KW



ALIMENTAZIONE
FEEDING



ALLACC. GAS
GAS CONNECTION

11FRG22R

450x1100x900

21

230 V

Ø 1/2"

VOLUME m³

PESO Kg
WEIGHT Kg

POTENZA ELETTRICA KW
ELECTRIC POWER KW

-

-

ALLACC. ELETTRICO
ELEC. CONNECTION


0,6

79

0,01

-

VAC230-1N 50/60Hz

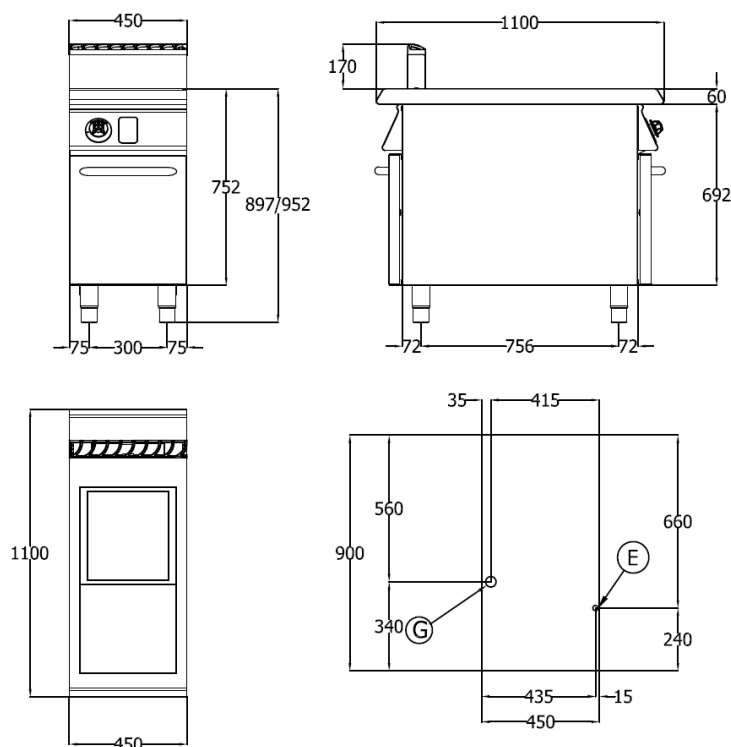

E = Allacciamento elettrico
Electrical connection

G = Gas Ø 1/2"